



2-D LiDAR Sensor

OMD12M-R2000-B23-V1V1D-HD-1L



- Middle operating range
- High angle resolution
- Infrared light
- Measuring method PRT (Pulse Ranging Technology)


R2000 HD, 2-D LiDAR sensor for simple measurement tasks and positioning, measuring range to object up to 12 m, Ethernet



Function

Based on Pulse Ranging Technology (PRT), the sensor is powerful for measurements with a long range and a small light spot. The device scans its environment over the complete measuring angle of 360°. Due to the high scanning frequency, this sensor type is suitable for advanced applications. The device meets laser class 1 and is eye safe. Additional precautions to protect the operating personnel are not required. The interactive all-round display integrated in the optical surface can freely display individual texts and graphics. A wide range of accessories enables the sensor to be used in different applications. A PACTware device type manager (DTM) specially developed for this series offers extensive configuration and diagnostic options.

Dimensions

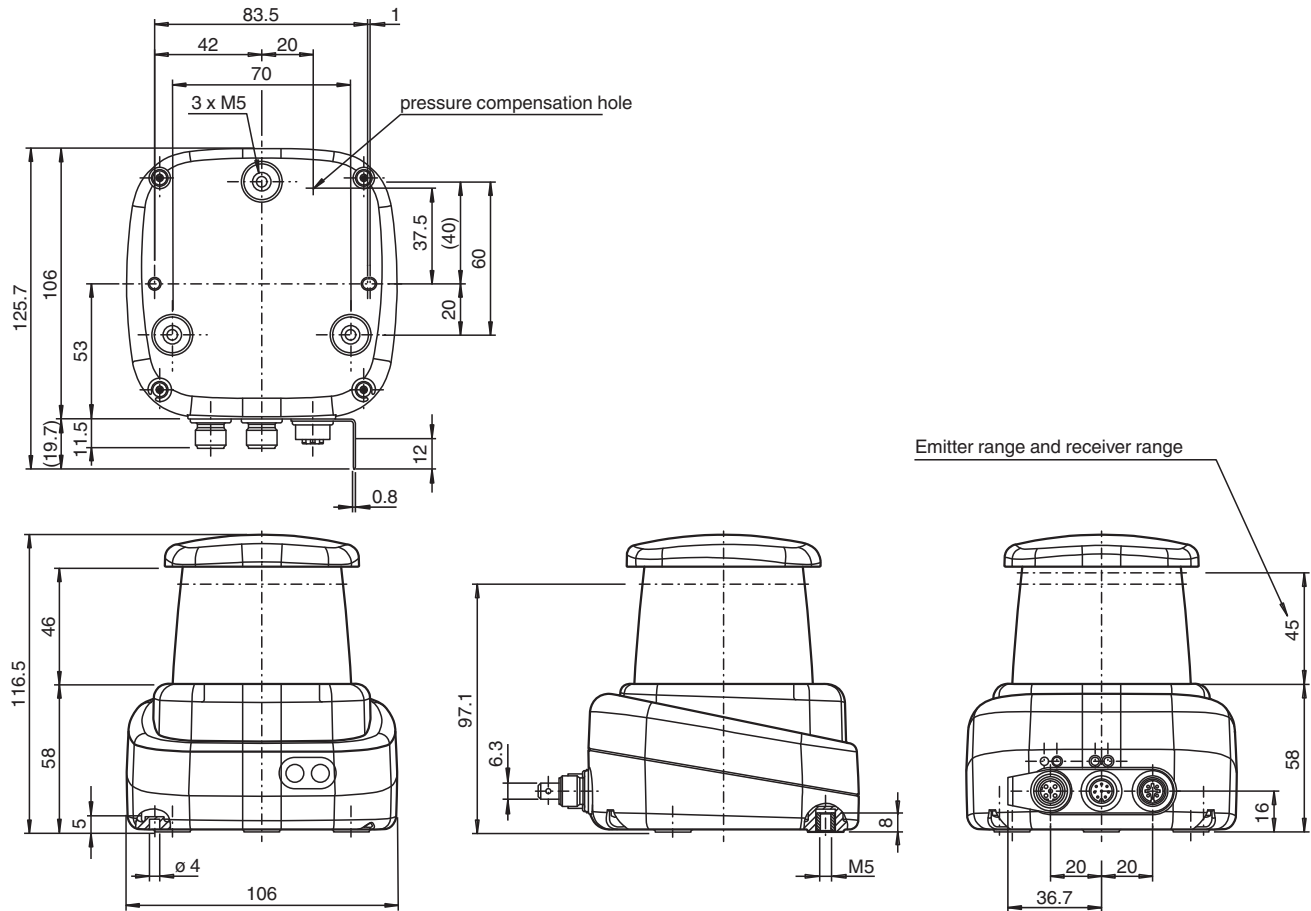

Technical Data


General specifications	
Measuring range	0.2 ... 10 m (black 10%) 0.2 ... 12 m (white 90 %) 0.3 ... 12 m (reflector) Min. reflectivity 2.5%
Light source	laser diode
Light type	modulated infrared light
Laser nominal ratings	
Note	LASER RADIATION , DO NOT STARE INTO BEAM
Laser class	1
Wave length	905 nm
Beam divergence	transversal 2 mrad , longitudinal 10 mrad
Pulse length	5 ns
Repetition rate	84 kHz
max. pulse energy	< 94 nJ
Measuring method	Pulse Ranging Technology (PRT)
Scan rate	10 ... 50 s ⁻¹
Scanning angle	360°
Diameter of the light spot	25 mm x 105 mm at 10 m
Ambient light limit	80000 Lux
Resolution	1 mm
Functional safety related parameters	
MTTF _d	75 a

Technical Data


Mission Time (T _M)		10 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green
Data flow indicator		LED yellow: active ethernet LED green: Ethernet link
Function indicator		LED red: fault LED yellow: Q1 + Q2
Control elements		2 Button
Parameterization indicator		24 x 252 pixels , red
Electrical specifications		
Operating voltage	U _B	10 ... 30 V DC
Ripple		10 % within the supply tolerance
No-load supply current	I ₀	≤ 400 mA / 24 V DC
Power consumption	P ₀	< 10 W
Time delay before availability	t _v	< 40 s
Interface		
Interface type		Fast Ethernet
Protocol		HTTP , TCP/IP and UDP/IP
Conformity		
Product standard		EN 60947-5-2
Shock resistance		EN 60068-2-27
Vibration resistance		EN 60068-2-6
Laser safety		EN 60825-1:2014
Measurement accuracy		
Measuring speed		84000 measurements per second
Measured value noise		typ. ± 20 mm (1 sigma)
Angle resolution		0.042 °
Absolute accuracy		typ. ± 40 mm
Repeat accuracy		< 12 mm
Approvals and certificates		
Protection class		III
UL approval		cULus Listed, Class 2 Power Source, Type 1 enclosure
CCC approval		CCC approval / marking not required for products rated ≤36 V
FDA approval		IEC 60825-1:2014 Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3 as described in Laser Notice 56, dated May 8, 2019.
Ambient conditions		
Ambient temperature		-10 ... 50 °C (14 ... 122 °F)
Storage temperature		-20 ... 70 °C (-4 ... 158 °F)
Relative humidity		95 % , no moisture condensation
Mechanical specifications		
Degree of protection		IP65
Connection		4-pin, M12x1 connector, standard (supply) , 8-pin, M12x1 connector, A-coded (MultiPort) , 4-pin, M12x1 socket, D-coded (LAN)
Material		
Housing		ABS + PC + Aluminum
Optical face		PMMA
Mass		approx. 0.8 kg
Dimensions		
Height		116.5 mm
Width		106 mm
Length		106 mm

Release date: 2026-04-16 Date of issue: 2026-04-16 Filename: 305984_eng.pdf


Connection Assignment

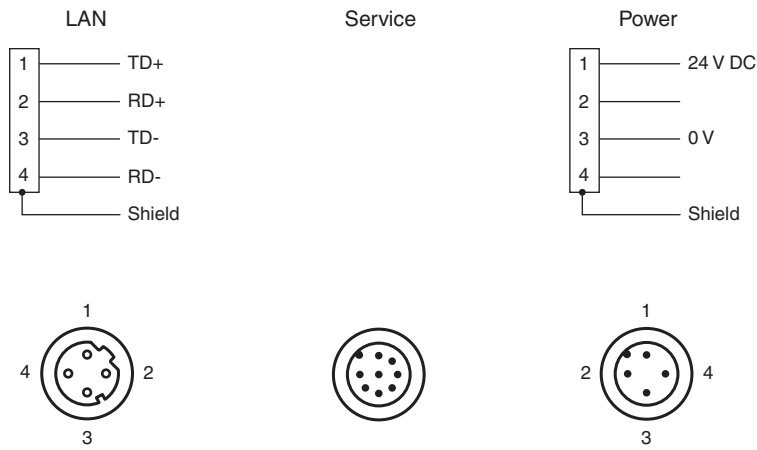

Assembly

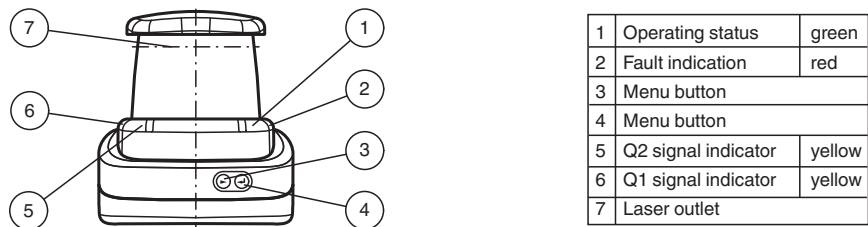

Characteristic Curve

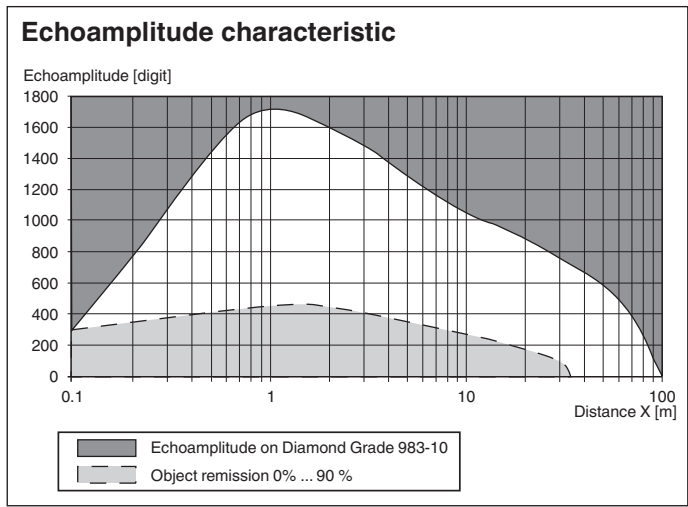

Release date: 2026-04-16 Date of issue: 2026-04-16 Filename: 305984_eng.pdf